


INNOVATION MADE IN GERMANY



Production Program

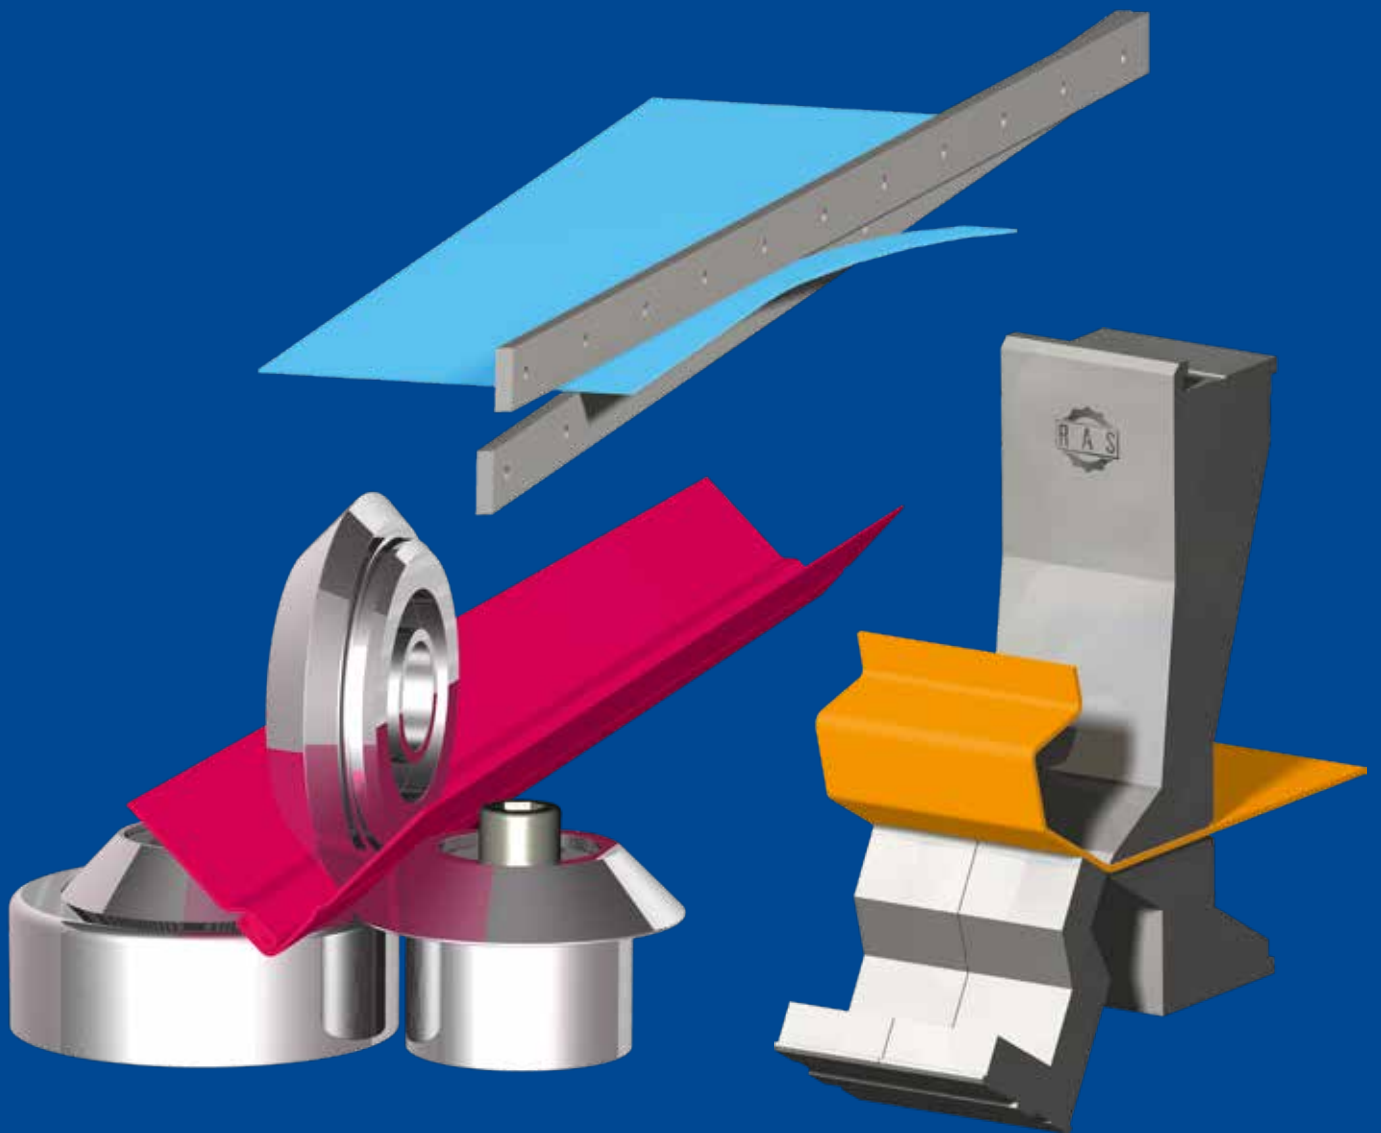


CUTTING

BENDING


FORMING

SOFTWARE

SMARTcut

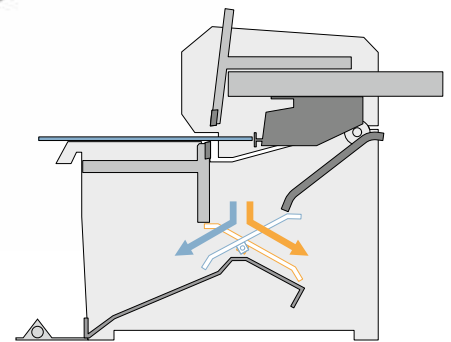

Sort cut pieces to the rear or the front.

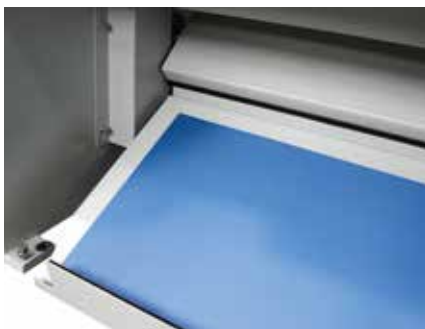

Parts chute for cut piece delivery to the front.




The foot lever switches the parts chute direction.



Convenient blank alignment with the LED cutting line illumination.

Technical data	Cutting length max.	Sheet thickness max.	Gauging depth
PRIMEcut RAS 53.30	3100 mm	3.0 mm	5 - 750 mm
SMARTcut RAS 52.30	3100 mm	2.0 mm	5 - 750 mm
SMARTcut RAS 52.25	2540 mm	2.5 mm	5 - 750 mm

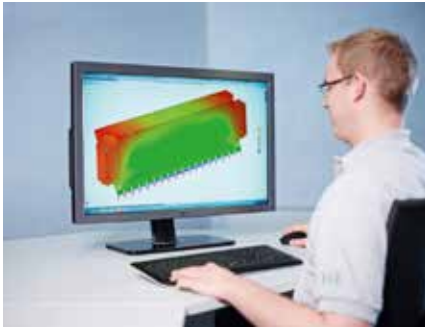

Design



Sawing



Plasma cutting



Milling



Turning



Grinding



Welding



Powder coating



Assembly



Electrical assembly



Quality inspection



RAS - Regional production for global sustainability



INNOVATION MADE IN GERMANY



09. 2018



Headquarters in Sindelfingen. In the foreground „Steel object“.



Efringen - factory and artwork



RAS Systems LLC in Georgia, USA

All sheet thickness refer to 400 N/mm² tensile strength. Subject to changes. Pictures may show options.



Founder Wilhelm Reinhardt



Managing Directors Rainer Stahl and Willy Stahl

RAS Reinhardt Maschinenbau GmbH

Richard-Wagner-Straße 4-10 | 71065 Sindelfingen

Fon: + 49-7031-863-0 | info@RAS-online.de

www.RAS-online.de