


INNOVATION MADE IN GERMANY



Production Program

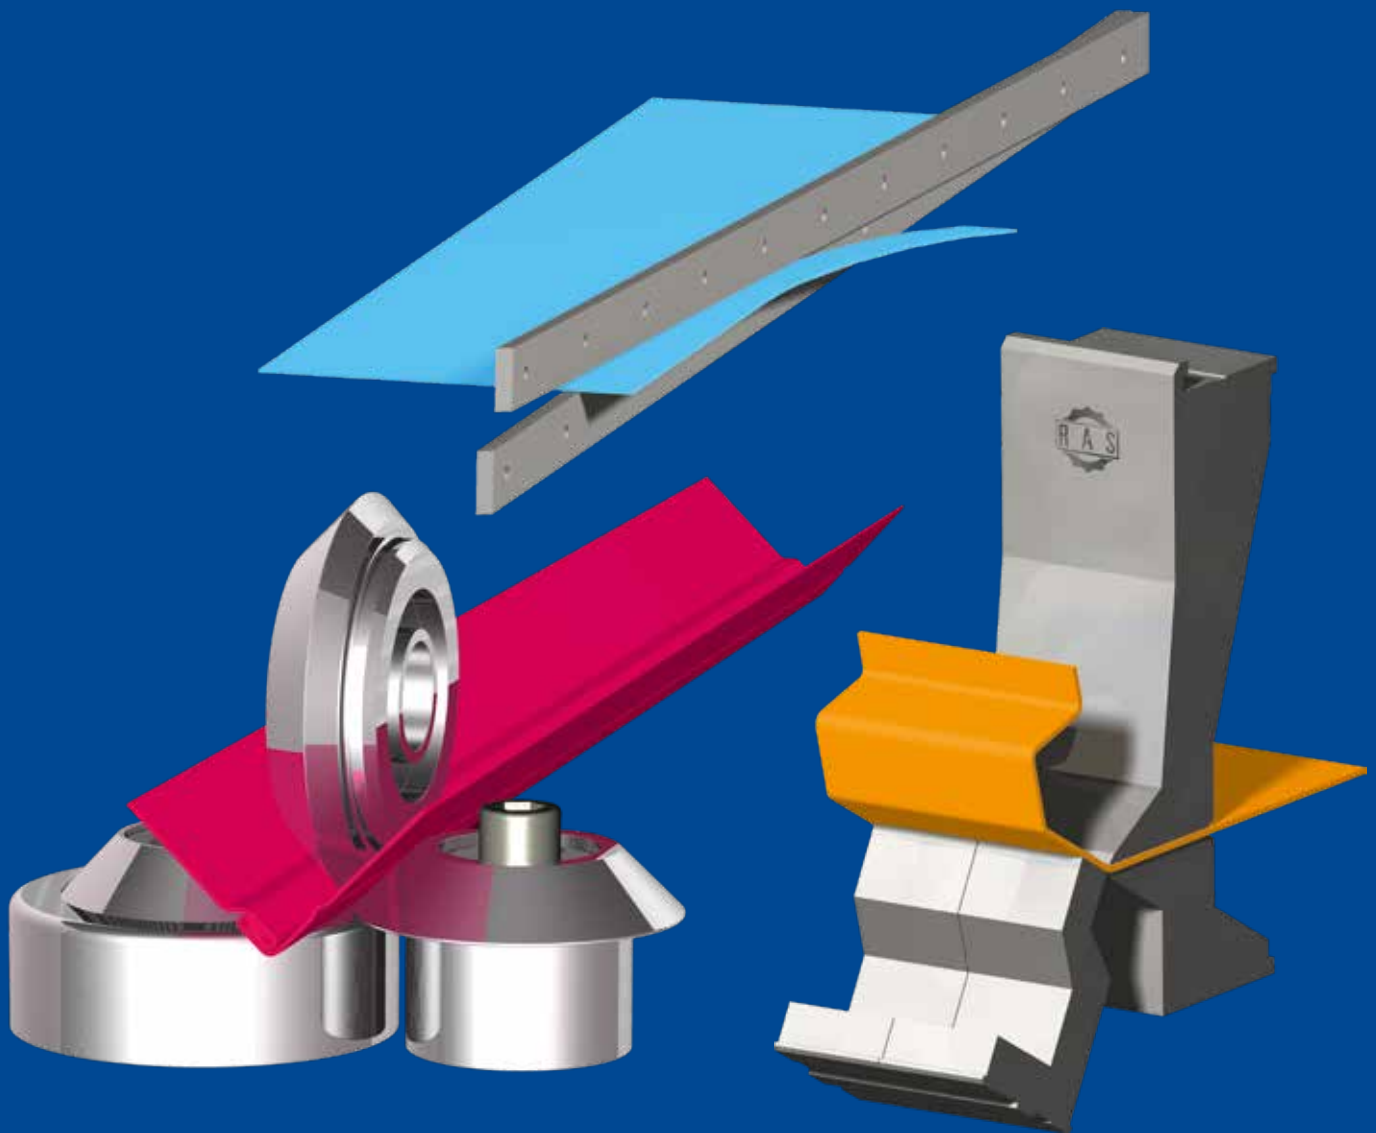

CUTTING


BENDING

FORMING

SOFTWARE

Roll Forming Machines

SpeedySeamer

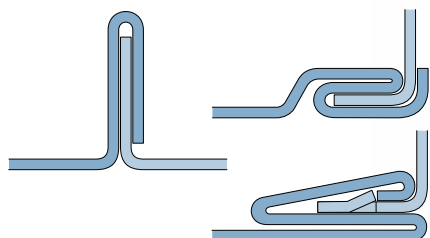

Standing seam, Pittsburgh seam, Snaplock seam, and „S“ seam




„S“ seam and drive cleat



Set of rolls for Pittsburgh seam



SpeedySeamer with lubricant spraying unit for stainless steel applications.

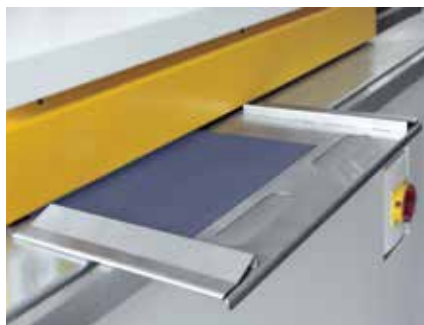


Small part material guide



Snaplock joint

Technical data	Sheet thickness max.	Rollforming stations	Speed
SpeedySeamer RAS 22.09	1.5 mm	9	16 m/min.
SpeedySeamer RAS 22.07	1.5 mm	7	16 m/min.

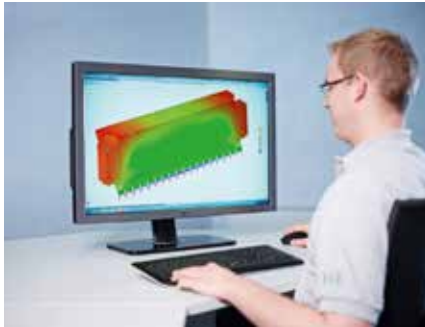

Design



Sawing



Plasma cutting



Milling



Turning



Grinding



Welding



Powder coating



Assembly



Electrical assembly



Quality inspection



RAS - Regional production
for global sustainability



INNOVATION MADE IN GERMANY



09. 2018



Headquarters in Sindelfingen. In the foreground „Steel object“.



Effringen - factory and artwork



RAS Systems LLC in Georgia, USA

All sheet thickness refer to 400 N/mm²
tensile strength. Subject to changes.
Pictures may show options.



Founder Wilhelm Reinhardt



Managing Directors Rainer Stahl and Willy Stahl

RAS Reinhardt Maschinenbau GmbH

Richard-Wagner-Straße 4-10 | 71065 Sindelfingen

Fon: + 49-7031-863-0 | info@RAS-online.de

www.RAS-online.de